




Deko 190 LC pictured (above)

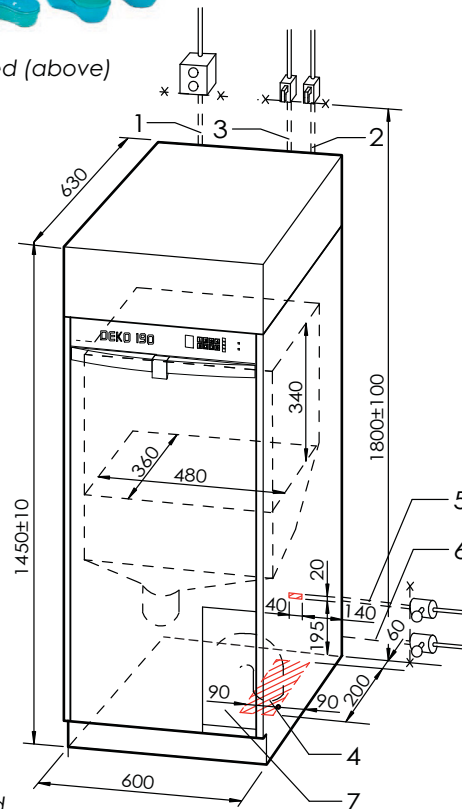

Dimensions pictured

## TECHNICAL SPECIFICATIONS

### 1. ELECTRICITY

240/415V AC, 3-phase + Neutral, 20Amp

**Please note:** Plug NOT included - Must be hard wired by installer. Plug MAY be fitted to machine at extra cost.

At time of installation check motor direction.

(International wiring rules apply)

### 2. COLD WATER

Flexible inlet hose with R $\frac{1}{2}$ " female thread, L = 2 m

(Min 5°C - Max 25°C)

Water flow rate: Min 100kPa - Max 600kPa

### 3. HOT WATER

Flexible inlet hose with R $\frac{1}{2}$ " female thread, L = 2 m

(Min 65°C - Max 80°C)

Water flow rate: Min 100kPa - Max 600kPa

### 4. WASTE OUTLET

Ø110 mm (hatched area for centre of the pipe)

Drain flow rate 2ltr / Sec, "S" or "P" trap inside machine

Max discharge temp 65°C.

### 5. STEAM - For steam heated model ONLY

Steam, flexible steel armoured inlet hose with R $\frac{1}{2}$ " male thread, L = 1,2 m

### 6. CONDENSATE - For steam heated model ONLY


Flexible steel armoured inlet hose with R $\frac{1}{2}$ " male thread, L = 1,2 m.

### 7. SUCTION HOSE and place for detergent.

Wall anchors will be supplied & must be installed by purchaser.

**ONLY ROOM VENTILLATION REQUIRED.**

## Floor and wall installation of the drain.

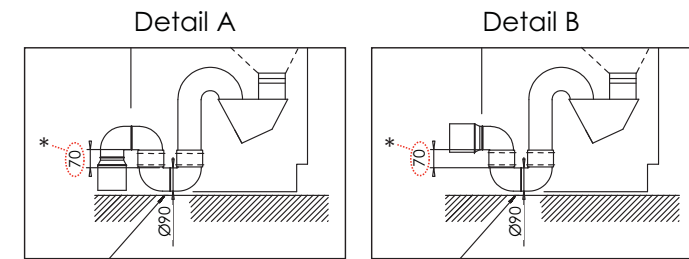

**Note:** There must be a space of 5mm between the plastic water trap and the floor.

**S - Trap**  
(Floor connection)

**P - Trap**  
(Wall connection)

*\*Please note: Failure to set this distance correctly can cause unit to malfunction.*



A typical drain connection pictured (above)



® WATERMARK LICENSE 22073

ATS 5200-104

This appliance incorporates back flow prevention complying with AS 3500.1.

No further back flow protection is required for connection to the water supply.