



TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	30
Cycle time * ¹	120 sec
Power supply	240V
Wash pump	80 W
Booster heater	2.0 kW
Total power	2.08 kW
Total current	9 Amp
Wash tank capacity	10 ltrs
Booster heater capacity	2.5 ltrs
Water consumption (per cycle)	1.9 ltrs
Min/max water pressure * ²	200/500kPa
Min/max water temp * ³	50/65°C
Rack size	350 x 350 mm
Useful height	195 mm
Weight (empty)	30 kg
Weight (shipping)	33 kg
Dimension (shipping)	47 x 54 x 74cm
Drain Type	Gravity (min 3ltr / sec)
Water connection	3/4" hose
Required hot water supply	55 ltr/hr
Drain hose diameter	22 mm

*¹ All Machines fitted with thermostop which may effect cycle time

*² Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 500kPa

*³ Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.



STANDARD FEATURES

- Insulated door
- Door safety switch
- Easy to use push button control
- Thermostop
- Built in rinse aid injector
- Fully automatic process
- Two minute cycle




The GS-35 is a compact, top quality stainless steel bench top bar washer.

Designed for areas with a small limited space, the GS-35 has all the benefits of the separate wash and rinse action used in larger machines.

The GS-35 is ideal for bars, coffee shops, wine cellars, take away and other food outlets that need to comply with HACCP guidelines.

TECHNICAL DRAWING

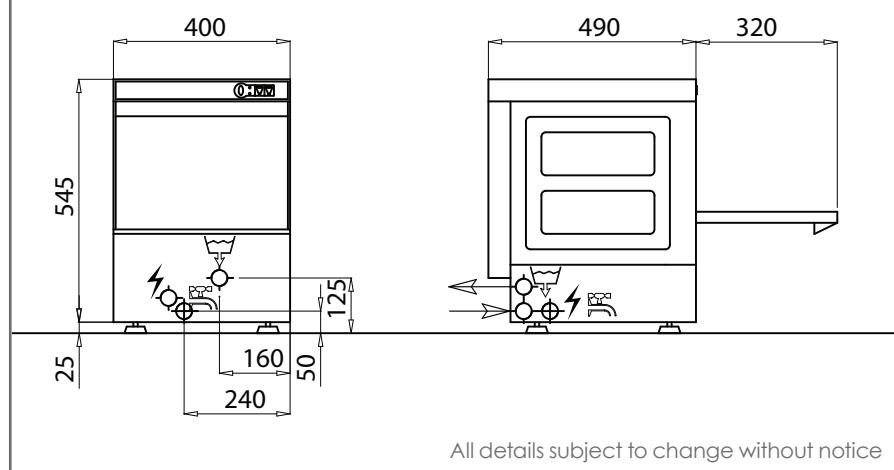

All details subject to change without notice

Call Rhima New Zealand
today on **0800 902 054**

