



TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	30/20
Cycle time *1	2 & 3 min
Power supply	240V
Wash pump	650 W
Booster heater	2.8 kW
Total power	3.02 kW
Total current	13.1 Amp
Wash tank capacity	29 ltrs
Booster heater capacity	5.7 ltrs
Water consumption (per cycle)	2.3 ltrs
Min/max water pressure *2	200/600kPa
Min/max water temp *3	50/65°C
Rack size	500 x 500 mm
Useful height	320 mm
Weight (empty)	56.5 kg
Weight (shipping)	72 kg
Dimension (shipping)	66 x 65 x 101 cm
Drain Type	Pumped (min 3ltr / sec)
Water connection	3/4" hose
Required hot water supply	70 ltr/hr
Drain hose diameter	24 mm

*1 All Machines fitted with thermostop which may effect cycle time

*2 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa

*3 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.



STANDARD FEATURES

- Insulated door
- Automatic drain pump
- Door safety switch
- Thermostop
- Built-in rinse aid injector
- 2 & 3 minute cycle
- AISI304 quality stainless steel
- Low water consumption
- Easy to use push button control




The GS-50ps is a dual cycle feature packed budget priced solution. It is powerful, compact and takes the standard 500 x 500mm rack.

The GS-50ps has a drain pump - this means that the machine can be installed in places where the actual waste connection is above the machine outlet point. (Maximum height of 40cm).

This versatile machine is perfect for small to medium sized restaurants on a budget.

TECHNICAL DRAWING

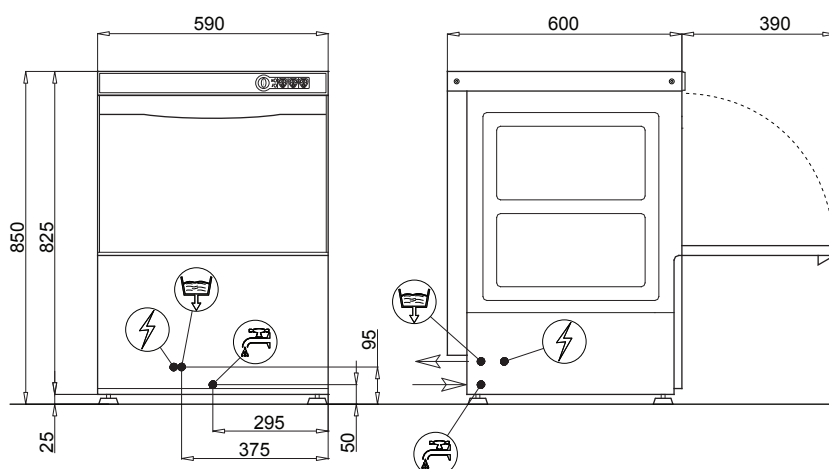

All details subject to change without notice

Call Rhima New Zealand
today on **0800 902 054**

