

HT-11eco PASS-THROUGH DISHWASHER **rhima**



TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	40/20
Cycle time *1	50/180 secs
Power supply	400 Vac 3N 50 Hz
Wash pump	900 W
Booster heater	6 kW
Wash tank heater	2.7 kW
Total power	7.43kW
Total current	16.6 Amp
Wash tank capacity	30 ltrs
Booster heater capacity	10 ltrs
Water consumption (per cycle)	2.8 ltrs
Min/max water pressure *2	200/600kPa
Min/max water temp *3	50/65°C
Rack size	500 x 500 mm
Useful height	390 mm
Max dish height	410 mm
Weight (empty)	100 kg
Weight (shipping)	118 kg
Dimension (shipping)	84 x 76 x 148 cm
Drain Type	Optional
Water connection	3/4" hose
Required hot water supply	120 ltr/hr
Drain hose diameter	24 mm

*1 All Machines fitted with thermostop which may effect cycle time

*2 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa

*3 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance. (Optional 8kW cold water booster heater)

Machine must be connected according to local regulations.




STANDARD FEATURES

- Two wash cycles with thermostop system
- Hood operated start/stop functions
- Wash/rinse arm with easy to remove & clean nozzles
- Door safety switch
- Double skinned tank
- Full scrap screens
- Built in rinse aid & detergent pump
- Easy access for maintenance
- Fully automatic process

The HT-11eco is a popular dishwasher for either straight through or corner operation. The large rear venting hood has an ergonomic, wrap around handle which makes hood opening easy from all angles. The HT-11eco is fully panelled for safety and hygiene with anti clogging stainless steel wash and rinse arms.



TECHNICAL DRAWING

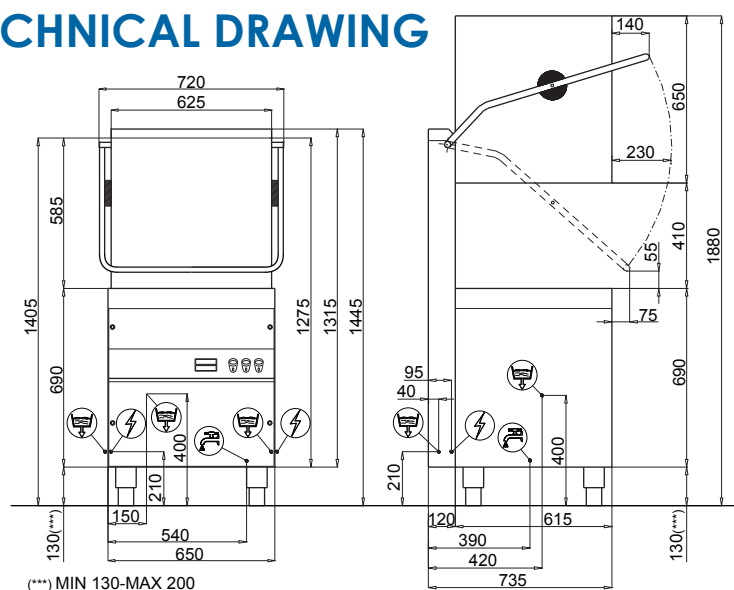

(***) MIN 130-MAX 200

All details subject to change without notice

Call Rhima New Zealand
today on **0800 902 054**

