



TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	60/40/30/20
Cycle time *1	60/90/120/180 sec
Power supply	240V
Wash pump	190 W
Booster heater	2000 W
Total power	2.08 kW
Total current	10Amp
Wash tank capacity	9.5 ltrs
Booster heater capacity	2.5 ltrs
Water consumption (per cycle)	1.4 ltrs
Min/max water pressure *2	200/600kPa
Min/max water temp *3	50/65°C
Rinsing temp (approx)	85°C
Rack size	350x350 mm
Useful height	195 mm
Weight (empty)	28 kg
Weight (shipping)	39 kg
Dimension (shipping)	50 x 58 x 72cm
Drain Type	Gravity (min 3ltr / sec)
Water connection	3/4" hose
Required hot water supply	55 ltr/hr
Drain hose diameter	22 mm

*1 All Machines fitted with thermostop which may effect cycle time

*2 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 500kPa

*3 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.

STANDARD FEATURES

- Door safety switch
- Double skin door
- Thermostop
- Built-in rinse aid injector
- Soft touch panel with temp and alarms
- 4 wash cycles plus self cleaning cycle
- Fully automatic washing process
- Low water consumption
- Backflow prevention valve
- Easy to remove nozzles
- One piece double filter & overflow




The GS-35T is a compact, top quality stainless steel bench top bar washer.

Designed for areas with a small limited space, the GS-35T has all the benefits of the separate wash and rinse action used in larger machines.

The GS-35 is ideal for bars, coffee shops, wine cellars, take away and other food outlets that need to comply with HACCP guidelines.

TECHNICAL DRAWING

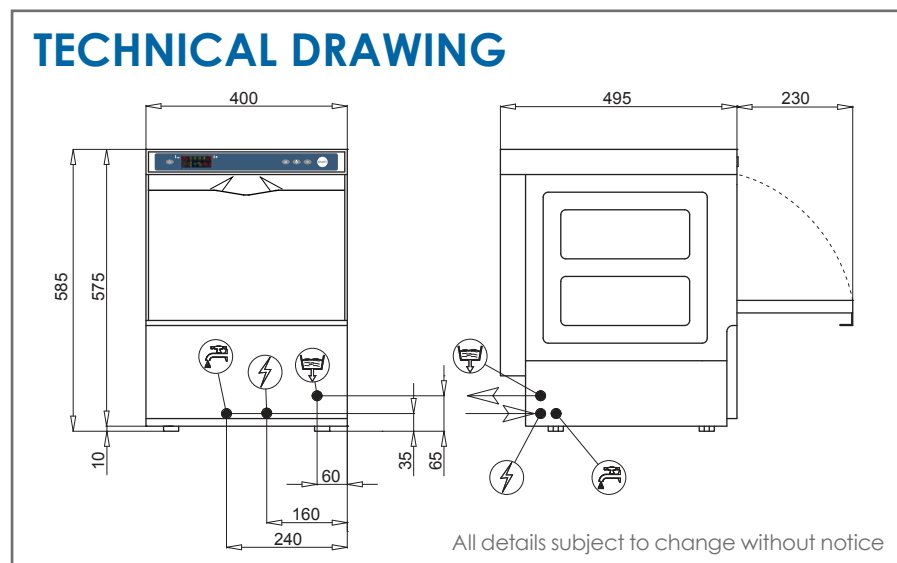

All details subject to change without notice



Call Rhima Australia
today on **1300 347 944**

