

VX-301 TUNNEL BASKET WASHER



TECHNICAL SPECIFICATIONS

Conveyor speed	2.0 - 2.6 mtr/min
Power supply	415V,3Ø+N 50Hz
Wash pump	2.18kW
Booster heater	21kW
Wash tank heater	12kW
Total power	53kW
Total current	3 x 75Amp
Wash tank capacity	110ltrs
Booster heater capacity	2x10 ltrs
Rinse water consumption (per hour)	365 ltrs
Min/max water pressure *1	200/600kPa
Min/max water temp *2	55/70°C
Max crate (WxH)	510x500mm
Useful height	500mm
Weight (empty)	435kg
Weight (shipping)	620kg
Dimension (shipping)	380L x 95W x 210Hcm
Water connection	3/4" hose
Drain diameter	Ø50mm

STANDARD FEATURES

- Double skinned construction, in AISI 304
- Deep formed wash tank and boiler in AISI 316
- Stainless steel scrap screens & pump filters
- Removable stainless steel wash & rinse arms
- User friendly electronic controls
- Rinse water saver
- Back-flow prevention valve



The VX-301 is suitable for the general food-industry, who needs to wash and sanitize a large number of crates each day.


Versatility is one of the most prominent advantages of the VX-301 combined with easy operations and absolute cleanness, according to the strictest hygiene requirements.

*1 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa

*2 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.

TECHNICAL DRAWING

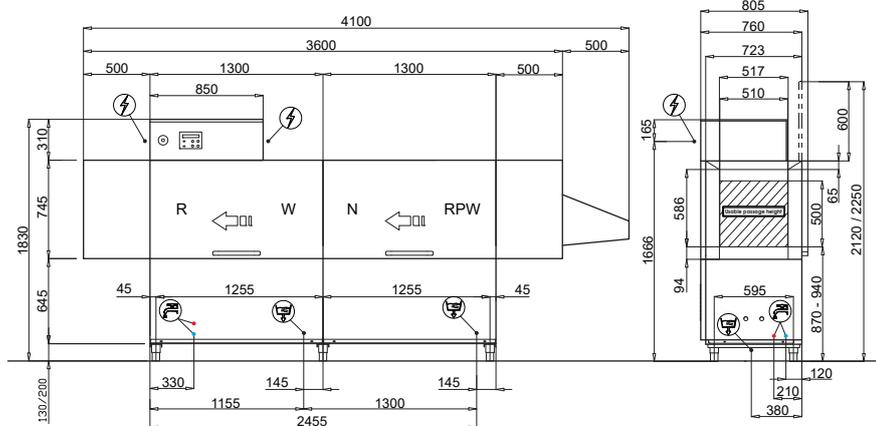

All details subject to change without notice

Call Rhima Australia
today on **1300 347 944**

